Portrait Operational Systems

- Cordless Systems
- Corded Systems (Standard Cordlock)
- Cordloop System (Chain Drive)
- > Motorisation
- Smart Fit (for French Doors)
- Vertical Blinds


1. Terminology

1.1 Cordless System

	REAL PROPERTY AND
Cordless TDBU	Cordless Day & Night
The second	
	6
62mm Cordless TDBU	62mm Cordless Day & Night
100	
	62mm Cordless TDBU



1.3 Corded System

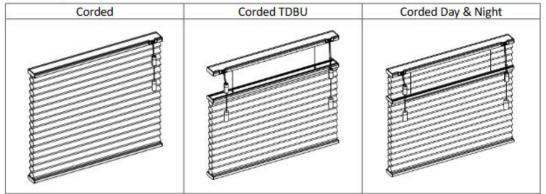


 Cord Loop / SmartRelease™ Cord Loop
 Cord Loop Top Down
 Cord Loop Day & Night

 Image: Cord Loop
 Image: Cord Loop
 Image: Cord Loop Day & Night



1.5 Motorisation

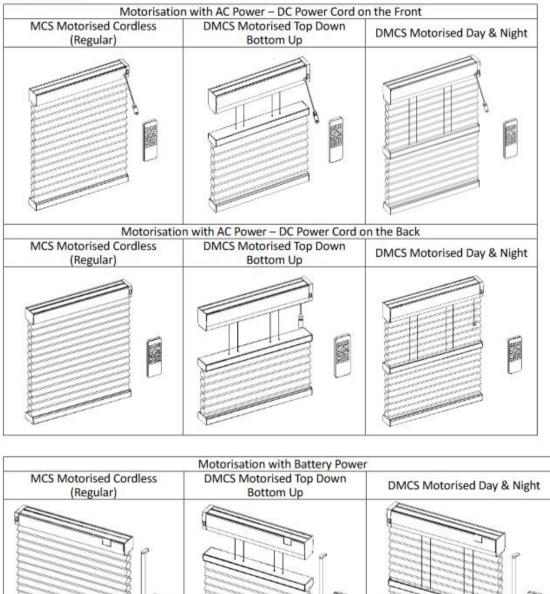

Disclaimer: Norman reserves all rights on updating or modification of any contents within this documentation without prior notification.

120



1.6 SmartFit Bottom Up (Mounting angle: 0° ~15°)




1.7 SmartFit[™] System (Mounting angle: 0° ~15°)




SmartFit [™] without Aluminum Preinstalled Top Rail				
25mm Single		45mm Single/ Double & 62mm Single/ Double		
Model A For width≦1270mm	Model B For width >1270mm	When inside mount and shade width>1016mm, there is a 2mm g between the headrail and the window opening.		




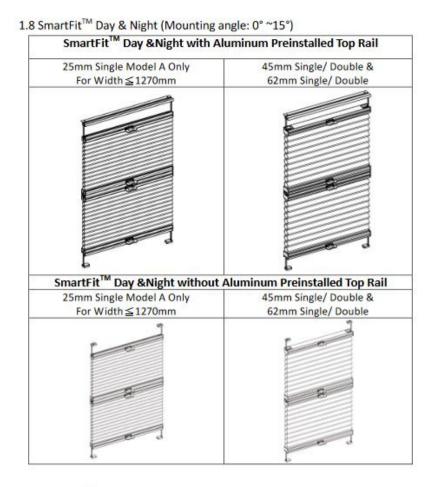

1.9 SmartFit [™] for Sloped Windows(Mounting angle: 45° ~90°)





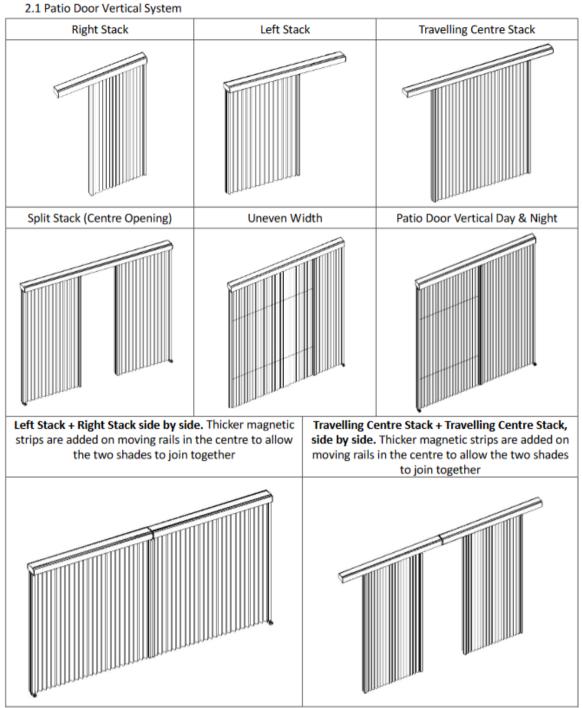

Disclaimer: Norman reserves all rights on updating or modification of any contents within this documentation without prior notification.

